



Cable ID: F/10-1A


Test Summary: PASS

Date / Time: 06/15/2005 10:21:48am
Headroom: 2.8 dB (NEXT 36-45)
Test Limit: TIA C5e 3 m Patch Cord
 Cable Type: ScTP 100 Ohm Cat 5e
 Fault Anomaly Threshold: 15%


Operator: P1
 Software Version: 4.920
 Limits Version: 5.13C
 NVP: 74.0%
 Shield Test: Disable

Model: DSP-4100
 Main S/N: 7708060
 Remote S/N: 7708060
 Main Adapter: LIA 006
 Remote Adapter: LIA 006


Wire Map	1 2 3 4 5 6 7 8 S
PASS	
	1 2 3 4 5 6 7 8




Length (ft)	[Pair 12]	12
Prop. Delay (ns)	[Pair 36]	18
Delay Skew (ns)	[Pair 36]	1
Resistance (ohms)		N/A

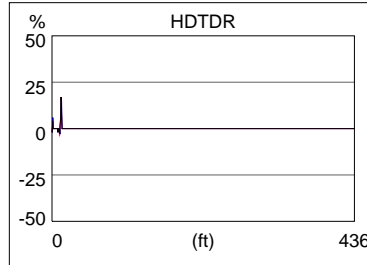

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45		36-45	
NEXT (dB)	2.8		4.4	
Freq. (MHz)	3.3		100.0	
Limit (dB)	63.7		34.9	

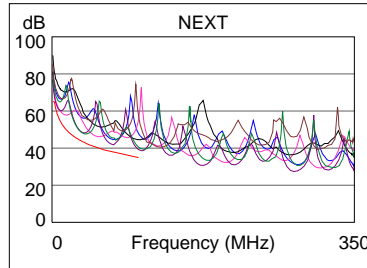

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	78		12	
RL (dB)	2.4		4.4	
Freq. (MHz)	28.4		98.8	
Limit (dB)	23.5		18.0	

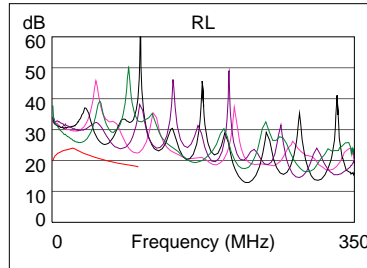



Cable ID: F/10-2A


Test Summary: PASS

Date / Time: 06/15/2005 10:24:15am
Headroom: 2.0 dB (NEXT 36-45)
Test Limit: TIA C5e 3 m Patch Cord
 Cable Type: ScTP 100 Ohm Cat 5e
 Fault Anomaly Threshold: 15%


Operator: P1
 Software Version: 4.920
 Limits Version: 5.13C
 NVP: 74.0%
 Shield Test: Disable

Model: DSP-4100
 Main S/N: 7708060
 Remote S/N: 7708060
 Main Adapter: LIA 006
 Remote Adapter: LIA 006


Wire Map	1 2 3 4 5 6 7 8 S
PASS	
	1 2 3 4 5 6 7 8



Length (ft)	[Pair 12]	12
Prop. Delay (ns)	[Pair 12]	16
Delay Skew (ns)	[Pair 12]	0
Resistance (ohms)		N/A

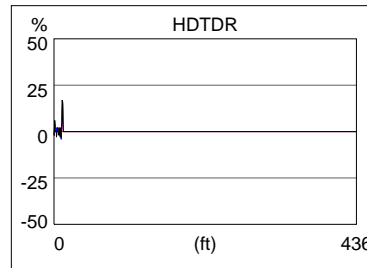

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45		36-45	
NEXT (dB)	2.0		2.7	
Freq. (MHz)	2.8		80.0	
Limit (dB)	65.0		36.8	

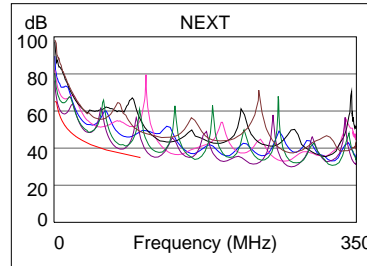

	MAIN	SR	MAIN	SR
	PASS			
Worst Pair	12		78	
RL (dB)	3.0		3.0	
Freq. (MHz)	82.0		100.0	
Limit (dB)	18.9		18.0	

